



## Back plinths

- In compliance with the health and safety regulation applied to electric installations, the Ambassade de Bourgogne back plinths make the cleaning at the rear of worktops possible. They are made in one single piece in the length requested.
- They leave a space of 9cm between the appliance and the wall and therefore improve the durability of the components situated at the rear of the cooker: contactor, selector switch, fan engine for example.
- By joining two back plinths together, it is possible to make a central unit.

### BACKPLINTH:

<b>DS 600</b>	Width: 600 mm
<b>DS 700</b>	Width: 700 mm
<b>DS 800</b>	Width: 800 mm
<b>DS 1000</b>	Width: 1000 mm
<b>DS 1100</b>	Width: 1100 mm
<b>DS 1200</b>	Width: 1200 mm
<b>DS 1300</b>	Width: 1300 mm
<b>DS 1400</b>	Width: 1400 mm
<b>DS 1500</b>	Width: 1500 mm
<b>DS 1600</b>	Width: 1600 mm
<b>DS 1700</b>	Width: 1700 mm
<b>DS 1800</b>	Width: 1800 mm
<b>DS 1900</b>	Width: 1900 mm
<b>DS 2000</b>	Width: 2000 mm

### BACKSPLASHES:

<b>CR 400</b>	W 400 - H 720
<b>CR 600</b>	W 600 - H 720
<b>CR 700</b>	W 700 - H 720
<b>CR 800</b>	W 800 - H 720
<b>CR 1000</b>	W 1000 - H 720



Back plinths



Backsplashes



### Scraper for smooth and ridged grills.


- Supplied with 3 smooth blades and 3 ridged blades.




The trivet allows small diameter pots and pans (for example blinis pans...) to be used over 3 and 4 kW burners...

# Accessories


Oven rack




Pastry plate



Perforated plate

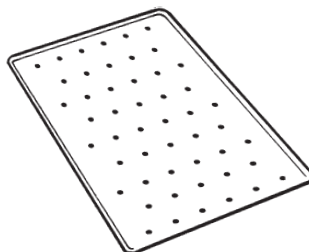

Roasting dish/Grill pan

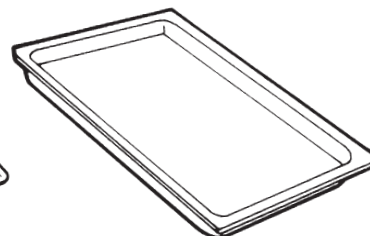

## COOKERS

641 1052	GF 040	TP 036		PR 040
741 731 1051 GA 1051 GACF	GF 530	TP 530	PP 530	PR 530
831/841	GF 620	TP 620		PR 620
1051 B	GF 090	TP 800		PR 800

## OVENS

705	GF 530	TP 530	PP 530	PR 530
605	GF 450	TP 450	PP 450	PR 450
501/502	GF 040	TP 036		PR 040
801	GF 620	TP 620		PR 620
806	GF 600	TP 600	PP 600	

705 **Special oven rack for FE 705 CT**

## Flexible "Tubogaz" gas connecting system



This universal, highly flexible connecting system has been developed for heavy-duty professional use. It is made of a PVC tube protected by a fire-proof sheath of braided stainless steel. In normal use conditions, this product's life is unlimited.

Supply connecting hose, marked "NF Gaz". Threaded nozzle Ø 12" – (15/21).

Ref.	RS 75	RS 100	RS 125	RS 150
Length	0,75 m	1 m	1,25 m	1,50 m



*The Chef's Choice.*