

Hard chrome gas griddle



CSG 610 SLRC

CE

Hard chrome gas griddle, 1/2 smooth, 1/2 ribbed.


- Steel plate, 1/2 smooth, 1/2 ribbed, 15 mm thick.
- + 30 μ (micron) hard chrome coating.
- Cooking surface: 567 x 495 mm (28 dm2).
- Juice collection channel with drainage outlet on the front.
- Removable drip tank, capacity: 1.5 litre.
- Removable 30/10 stainless steel splash-guard (welded on the griddle plate to ensure watertightness).
- Power rating: 8.5 kW.
- 2 heating zones, each with their own burner.
- Thermostatic control 100-300°C.
- · Safety thermocouple.
- Electric ignition via push-button on the front. Power supply: 230 V.

CSG610SLRC

L 600 – D 650 – H 300



For the supports, see the list on the back.

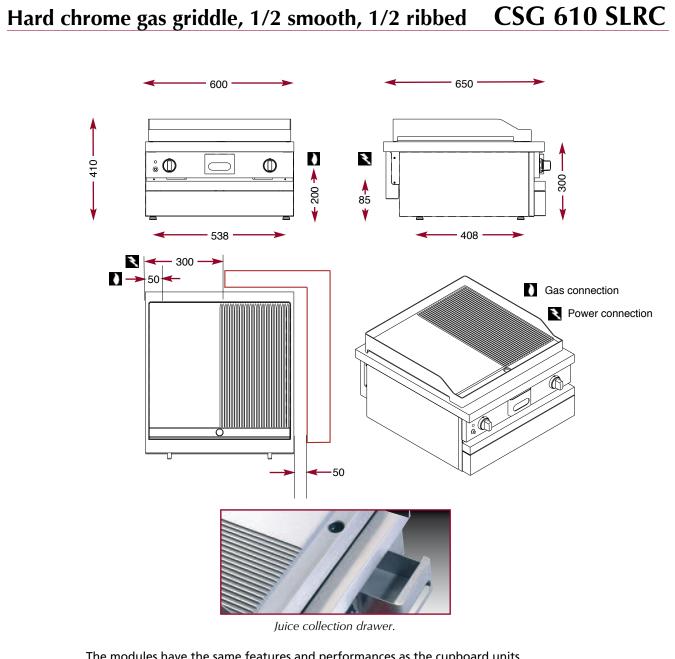

The modules have the same features and performances as the cupboard units. They are designed to be fixed onto tubular steel supports but can also be installed on stainless steel or tiled worktops.

Tubular stainless steel supports for the modules. (All the supports are made of Ø 60mm stainless steel tubes and are fitted with a stainless steel shelf and height adjustable feet).	
Réf.	Dimensions
SSK 400	L 400 - P 540 - H 600
SSK 600	L 600 - P 540 - H 600
SSK 700	L 700 - P 540 - H 600
SSK 800	L 800 - P 540 - H 600
SSK 1000	L 1000 - P 540 - H 600
SSK 1100	L 1100 - P 540 - H 600
SSK 1200	L 1200 - P 540 - H 600
SSK 1300	L 1300 - P 540 - H 600
SSK 1400	L 1400 - P 540 - H 600
SSK 1500	L 1500 - P 540 - H 600
SSK 1600	L 1600 - P 540 - H 600





The Chef's Choice.